


Pacific Steam Autoclave Boiler

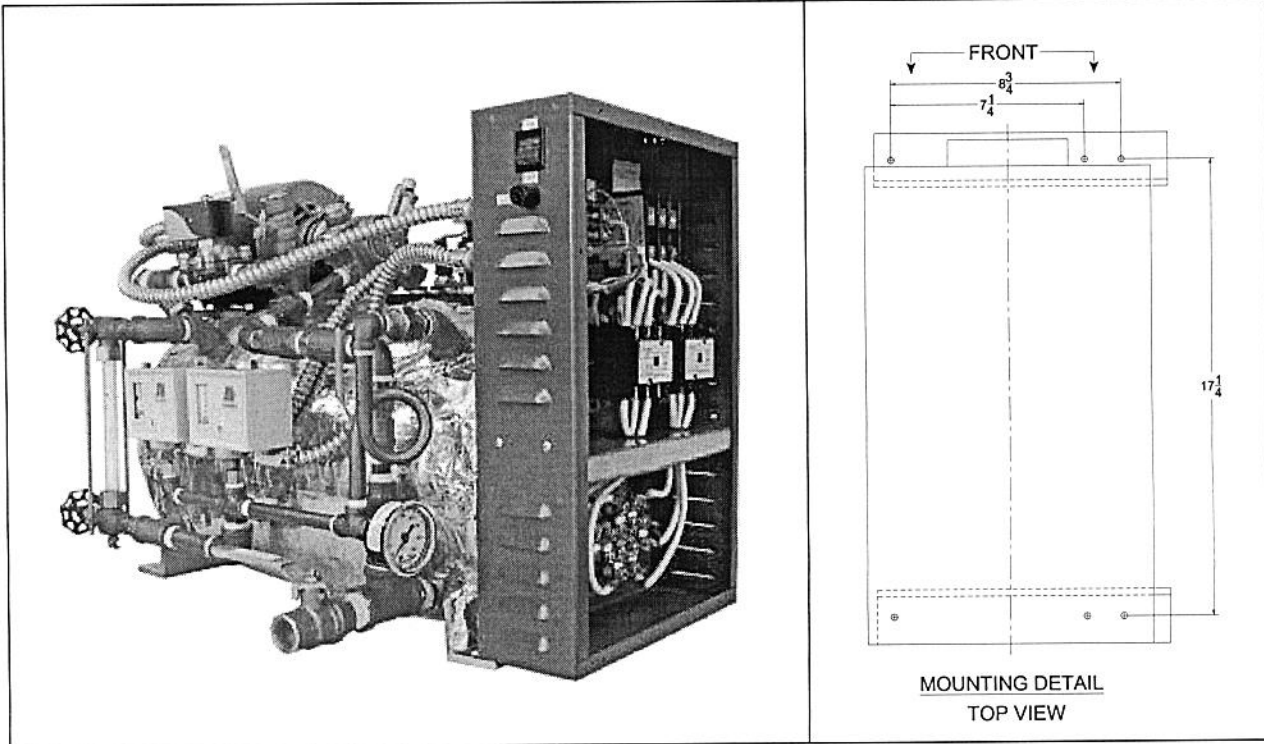

FEATURES	SPECIFICATIONS
<ul style="list-style-type: none"> • Specially designed for quick boiler replacement & easier service • Two 3-1/8" diameter hand holes for easy clean-up • 4.5"x4.5" flange mount single heating element • Shut-off switch on the cabinet for easy service • Innovative probe system • All external piping furnished in brass or bronze • Built per ASME Section 1, Part PMB 	<ul style="list-style-type: none"> • Max. Working Pressure: 100 psig (350 °F) • Heating Element Rating: 20 kW or 30kW; 208, 240, or 480V; 3ph • Water Feed Pump Rating: 1/4HP, 120V, 1ph, 25GPM @100 psi • Connection sizes: 1/2" steam outlet, 1/2" water inlet, 3/4" drain/blow-down valve • Net Weight: 150 lbs • Shipping Weight: 170 lbs • Shipping Dimensions: 22" x 28" x 26"H

Pacific Steam boilers are built in strict accordance with ASME requirements with all operations inspected by the National Board of Boiler and Pressure Vessel Authorized Inspectors.