


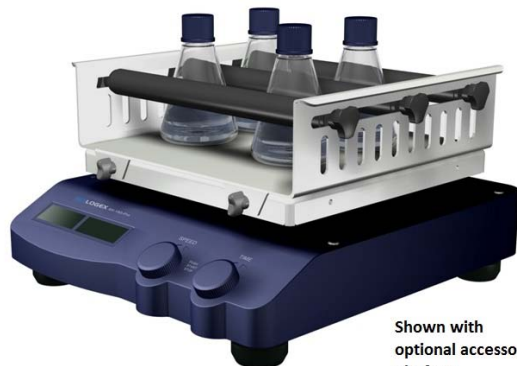

Shown with
optional accessory
platform

Specifications

	SK-O180-Pro SK-L180-Pro
Voltage[VAC]	100-240
Frequency[Hz]	50/60
Power[W]	30
Shaking motion	Orbital/Linear
Orbital diameter[mm]	4
Max. load capacity (with platform) [kg]	2.5
Motor type	DC brushless motor
Motor rating input[W]	28
Motor rating output[W]	15
Speed range[rpm]	100-350 (Linear) 100-800 (Orbital)
Speed display	LCD
Timer	Yes
Timer display	LCD
Time setting range[min]	1-1199
Operation type	Continuous / timed operation
Dimensions[W × H × D mm]	340 × 300 × 100
Weight[kg]	8.1
Permissible ambient temperature[°C]	5-40
Permissible relative humidity	80%
Protection class acc. DIN EN60529	IP21
RS232 interface	Yes

Labequip

170 Shields Court Unit 2
Markham, ON L3R 9T5
TEL: (905) 475-5880 ext. 226
FAX: (905) 475-1231

Optional accessory



SK180.2

Fixing clip
attachment



P/N						
Descriptions	Fixing clip for flask volume 25ml, used with SK330.2 & SK180.2	Fixing clip for flask volume 50ml, used with SK330.2 & SK180.2	Fixing clip for flask volume 100ml, used with SK330.2 & SK180.2	Fixing clip for flask volume 200/250ml, used with SK330.2 & SK180.2	Fixing clip for flask volume 500ml, used with SK330.2 & SK180.2	Bar for SK180.1 universal attachment
Used with Shakers						
Orbital and Linear Shaker (2.5kgs)	●	●	●	●	●	●



170 Shields Court Unit 2
Markham, ON L3R 9T5
TEL: (905) 475-5880 ext. 226
FAX: (905) 475-1231