

E**STERILMATIC STERILIZER
(AUTOCLAVE)**

JOB NAME: _____

ITEM NO.: _____

NO. REQUIRED: _____

MODELS

- ☐ **STM-E** - Domestic Fixed Temperature
- ☐ **STM-EL** - Domestic Adjustable Temperature
- ☐ **STM-EX** - Export Fixed Temperature
- ☐ **STM-ELX** - Export Laboratory Adjustable Temperature

DESCRIPTION

Will be a Market Forge Electric Model _____ Automatic Steam Pressure Sterilmatic Sterilizer (Autoclave). The Sterilmatic is dependable, and ideally suited for laboratories, veterinary clinics, processing plants and more. For use at altitudes up to 6500ft (200m).

CYLINDER

Sterilizing cylinder will be A.S.M.E. constructed and National Board Registered 3/16" (4.8mm) thick welded aluminum.. Sterilizer exterior is made of polished stainless steel. Interior dimensions of 16" (406mm) in diameter and 26" (660mm) long with a cubic content of 5,220 cubic inches (85 liters) and will have a door opening of 13-1/2" (343mm) wide and 11" (279mm) high. Sterilizing compartment will have a pan capacity of:

- ☐ (3) 12" x 20" x 2-1/2" (305mm x 508mm x 64mm) or
- ☐ (2) 12" x 20" x 4" (305mm x 508mm x 102mm) or
- ☐ (1) 12" x 20" x 6" (305mm x 508mm x 152mm)

DOOR

The sterilizer door will be self-sealing type which cannot be opened until steam pressure is completely exhausted. Door will be 12 gauge stainless steel, removable for cleaning without tools. Door gasket will be one-piece molded, replaceable without tools or cement.

OPERATION

Sterilizing cycle will be fully automatic, time-controlled and have a built-in temperature control which provides 250°F (121°C). Model STM-EL has the additional feature of an adjustable temperature control that can be set anywhere from 230°-250°F (110°-121°C) range. All operating controls will be located at the top, front of the Sterilizer. Pressure will be automatically and quickly exhausted and power supply shut off at termination of cycle. Slow exhaust may be selected for sterilizing liquids.

STANDARD FEATURES

- Automatic temperature control
- Thermometer 180°-300°F (82°-149°C)
- Safety valve
- 0-30 lb. steam gauge
- 0-60 minute timer
- Low water cut-off
- Thermostatic steam trap
- Signal light
- Flat perforated steam baffle
- Removable pan supports
- Adjustable 4" to 6" bullet feet
- Manual fill



STM-E shown

SHIPPING WEIGHT

- All Models - 150 lbs (68 kg)

**OPTIONS & ACCESSORIES
(at additional charge)**

- Sterilmatic trays (stainless steel, one piece, round cornered) Perforated trays available in the following sizes:
 - ☐ 12" x 20" x 2-1/2" (holds 3 of this size)
 - ☐ 12" x 20" x 4" (holds 2 of this size + one 2-1/2" tray)
 - ☐ 12" x 20" x 6" (holds one of this size + one 2-1/2" tray)
- Sterilmatic wire basket (recommended for dressings)
Available in the following sizes:
 - ☐ 12" x 20" x 2-1/2"
 - ☐ 12" x 20" x 4"
- ☐ Sterilmatic tubular leg stainless steel stand with shelf
- ☐ Second shelf for tubular leg stainless steel stand
- ☐ Exhaust condenser (for condensing exhaust steam when unit cannot be vented to outside)

Tel: (802) 658-6600 • Fax: (802) 864-0183 • www.marketforge.com

ELECTRICAL SPECIFICATIONS

Model	kW	Hz	1 Phase			3 Phase			
			208V	220V	240V	208V	240V	220/380V	240/415V
STM-E	9.3	60	45A	-	-	26A	-	-	-
STM-EL	12.4	60	-	-	52A	-	30A	-	-
STM-EX	10.4	50	-	48A	-	-	-	16A	-
STM-ELX	12.4	50	-	-	52A	-	-	-	18A

Unit must be grounded. Main supply voltage fluctuations are not to exceed $\pm 10\%$ nominal supply voltage.

Clearance from combustible and non-combustible construction should be a minimum of 4" in the back and 2" on the sides.




SERVICE CONNECTIONS

A	Drain - 1/2" (13mm) N.P.T. of 3/8" (10mm) OD copper (see note 1)
B	Steam Exhaust Connection - 5/8" (16mm) (see note 2)
C	Electrical Connection - (*see electrical specifications)
D	Power Supply

NOTES:

1. An air break must be provided if a unit drain line is run.
2. Vent exhaust to atmosphere. B1 is actual connection, but must exit casing at B.
3. Heat of Rejection (Heat Loss Into the Room) 6,000 BTU'S.
4. For use at altitudes up to 6500ft (200m).

DIMENSIONS ARE IN INCHES [MM]

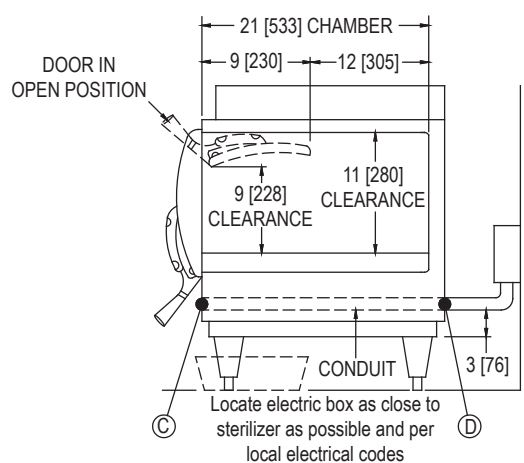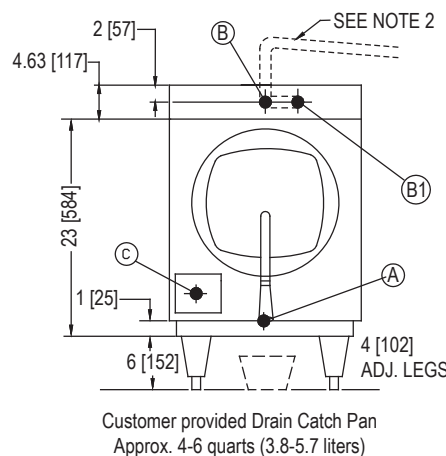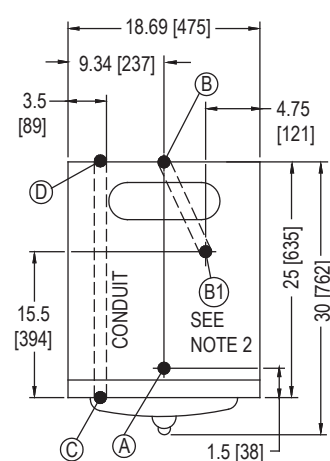

The manufacturer reserves the right to modify materials and specifications without notice.