

Premium Series | Pocket Testers



pH / ORP / Conductivity / TDS / Salinity





Durable design:
IP67 Waterproof & Dustproof




Easy-to-install
Replaceable Probes




Powered by AAA batteries,
up to 2000 hours of operation time

Display Features




Measurement Mode



Calibration Mode



Reading Alarm Mode

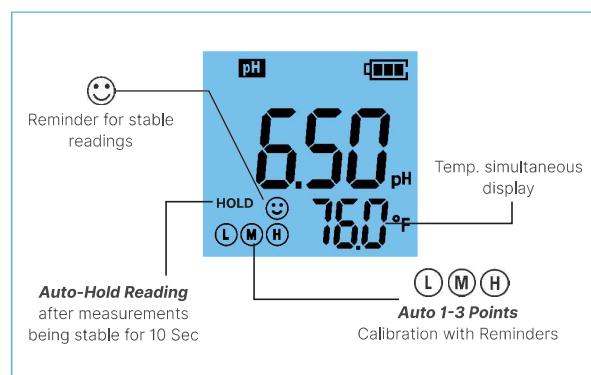

Different Probes for various applications

6 Models for your choice



PH60-E (Glass Bulb)
General water solutions



PH60F-E (Flat)
Surface and
micro-volume



PH60S-E (Spear)
Solid/Semi-Solid
Samples



ORP60-E (ORP)
ORP Test



EC60-E (Platinum Black)
Conductivity/TDS/Salinity
Test



PC60-E (Glass Bulb & Platinum Black)
pH/Cond./TDS/Salinity
Test

Applications



Test anywhere



Micro-Volume pH Test



Skin pH Test



Food pH Test

Premium Series | Pocket Testers



	Model	PH60	PH60F	PH60S
pH	Measuring Range	-2.00 to 16.00 pH		
	Resolution/Accuracy	0.01 pH / ±0.01 pH±1 digit		
	Calibration	1 to 3 point Auto Calibration		
ORP	Measuring Range	±1000 mV		
	Resolution/Accuracy	1 mV / ±0.2% F.S		
Temp.	Measuring Range	0 to 50.0 °C (32 to 122°F)		
Others	Temp. Compensation	Automatic 0 to 50.0 °C (32 to 122°F)		
	Heads-Up Function	Yes		
	Self-Diagnosis	Yes		
	Low-Battery Warning	Yes		
	IP Rating	IP67 Waterproof and Dustproof		
	Power Supply	DC3V AAA batteries x4; operating time up to 2000 hours		
	Default Sensor Model	PH60-E	PH60F-E	PH60S-E
	Application	General water solution's pH	Flat surface pH (fabrics, skin, paper) and micro-volume water solution's pH	Solid/Semi-Solid food samples (cheese, meat, fruit, sushi rice...)and soil's pH
	Compatible Probes	PH60-E, PH60F-E, PH60S-E, ORP60-E		

PH60 COMPLETE TEST KIT





	Model	PC60	EC60	ORP60
pH	Range	-2.00 to 16.00 pH	/	/
	Resolution/Accuracy	0.01 pH / ±0.01 pH±1 digit	/	/
	Calibration	1 to 3 Points Auto Calibration	/	/
ORP	Range	/	/	±1000 mV
	Resolution/Accuracy	/	/	1 mV / ±0.2% F.S
Cond.	Range	0-200.0 µS/cm, 0-2000 µS/cm, 0-20.00 mS/cm	0-200.0 µS/cm, 0-2000 µS/cm, 0-20.00 mS/cm	/
	Resolution/Accuracy	0.1/1 µS, 0.01 mS / ±1% F.S	0.1/1 µS, 0.01 mS / ±1% F.S	/
	Calibration	1 to 3 Points Auto Calibration	1 to 3 Points Auto Calibration	1 Point Manual Calibration
	Temp. Coefficient Setting	0.00 to 4.00%/°C	0.00 to 4.00%/°C	/
TDS	Range	0.0 ppm to 10.00 ppt	0.0 ppm to 10.00 ppt	/
	TDS. Factor Setting	0.4 to 1.0	0.4 to 1.0	/
Salinity	Range	0 to 10.00 ppt	0 to 10.00 ppt	/
Temp.	Range	0 to 50.0 °C (32 to 122°F)		
Others	Temp. Compensation	Yes		No
	Heads-Up Function	No	No	Yes
	Self-Diagnosis	Yes		
	Low-Battery Indicator	Yes		
	IP Rating	IP67 Waterproof and Dustproof		
	Power Supply	DC3V AAA batteries x4; operating time up to 1000 hours		DC3V AAA batteries x4; operating time up to 2000 hours
	Default Sensor Model	PC60-E	EC60-E	ORP60-E
	Compatible Probes	PH60-E, PH60F-E, PH60S-E, PC60-E, EC60-E	EC60-E	ORP60-E