


Pacific Steam Autoclave Boiler



170 Shields Court Unit 2
Markham, ON L3R 9T5
TEL: (905) 475-5880 ext. 226
FAX: (905) 475-1231

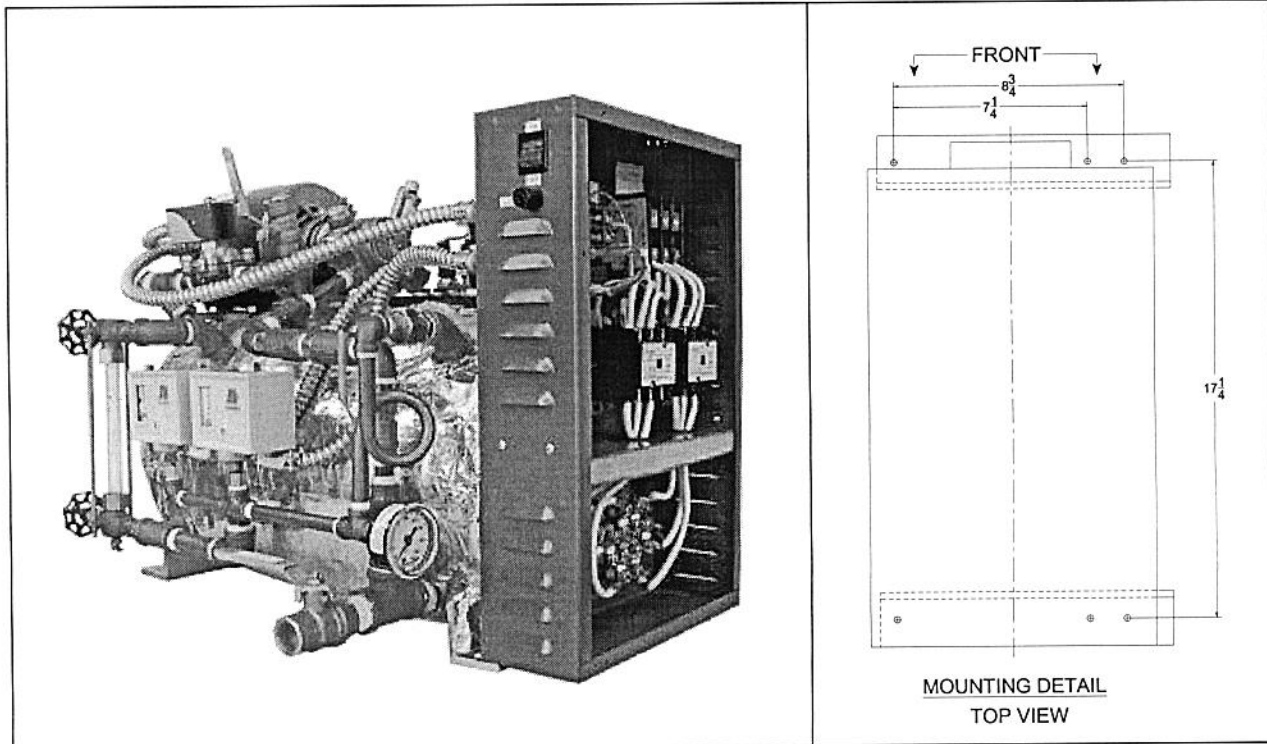

FEATURES

- Specially designed for quick boiler replacement & easier service
- Two 3-1/8" diameter hand holes for easy clean-up
- 4.5"x4.5" flange mount single heating element
- Shut-off switch on the cabinet for easy service
- Innovative probe system
- All external piping furnished in brass or bronze
- Built per ASME Section 1, Part PMB

SPECIFICATIONS

- Max. Working Pressure: 100 psig (350 °F)
- Heating Element Rating:
20 kW or 30kW; 208, 240, or 480V; 3ph
- Water Feed Pump Rating:
1/4HP, 120V, 1ph, 25GPM @100 psi
- Connection sizes: 1/2" steam outlet, 1/2" water inlet, 3/4" drain/blow-down valve
- Net Weight: 150 lbs
- Shipping Weight: 170 lbs
- Shipping Dimensions: 22" x 28" x 26"H

Pacific Steam boilers are built in strict accordance with ASME requirements with all operations inspected by the National Board of Boiler and Pressure Vessel Authorized Inspectors.