



PLASTECH Series



Housing

- Polypropylene casing
- High corrosion resistant
- From 15 to 8,830 CFM
- From 0.1 to 8.1 inWg
- Single block without welded joint
- UV treated
- Available in CW and CCW discharge positions/ rotatable in all discharge positions
- Inlet and motor flanges made of polypropylene




Impellers


- Forward curved
- Made of polypropylene
- Cap hub made of polypropylene
- Electronically and dynamically balanced

Mounting supports

PLASTECH fans can be provided in different configurations



Stainless steel stand



Weather hood



Roof kit

Explosion resistant

All the PLASTECH fans are available in Explosion resistant version. Our fans are compliant with all international standards: NEC 500/505, ATEX (EN60079) and European Directives (99/92/EC and 94/9/EC).



EXPLOSION RESISTANT MARKING

NEC 500 : CLASS I DIV II GROUP A,B T4

NEC 505 : CLASS I ZONE II AEx d GROUP IIC T4

ATEX : Ex II 3G Ex c GROUP IIC T4

AMCA Certified



PLASTECH Ventilation certifies that the PLASTECH Series shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.»

Performance certified is for installation type D - Ducted inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances (accessories). Maximum fan input power over the range catalogued, or fan input power at the stated duty, or maximum motor input watts, voltage and frequency over the range catalogued, or motor input watts, voltage, and frequency at the state duty. - Rating Methods D.

The sound power level ratings shown are in decibels, referred to 10-12 watts, calculated per AMCA standard 301. Values shown are for inlet Lwi and LwiA sound power levels for installation Type D: Ducted inlet, Ducted outlet. Ratings include the effects of duct end correction. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Sound pressure levels are not licensed by AMCA international.

PLASTEC Series

Table of references


Asynchronous series

	Motor RPMs	Motor Horse Power (HP)	Voltage (V)	Phase	Weight (lbs)	Part number
PLASTEC 15	1140	0,25	115/230	Single	19	P15S56P025
	1140	0,25	230/460	Three	19	P15ST6P025
	1725	0,33	115/230	Single	16	P15S54P033
	1725	0,33	230/460	Three	16	P15ST4P033
	3450	0,5	115/230	Single	17	P15S52P050
	3450	0,5	230/460	Three	17	P15ST2P050
PLASTEC 20	1140	0,25	115/230	Single	22	P20S56P025
	1140	0,25	230/460	Three	22	P20ST6P025
	1725	0,33	115/230	Single	19	P20S54P033
	1725	0,33	230/460	Three	19	P20ST4P033
	3450	1	115/230	Single	32	P20S52P100
	3450	1,5	115/230	Single	32	P20S52P150
	3450	1	230/460	Three	32	P20ST2P100
	3450	1,5	230/460	Three	32	P20ST2P150
PLASTEC 25	1140	0,25	115/230	Single	24	P25S56P025
	1140	0,25	230/460	Three	24	P25ST6P025
	1725	0,5	115/230	Single	29	P25S54P050
	1725	0,75	115/230	Single	29	P25S54P075
	1725	0,5	230/460	Three	29	P25ST4P050
	1725	0,75	230/460	Three	29	P25ST4P075
	3450	3	230/460	Three	47	P25ST2P300
	3450	4	230/460	Three	47	P25ST2P400
PLASTEC 30	1140	0,75	115/230	Single	42	P30S56P075
	1140	0,75	230/460	Three	42	P30ST6P075
	1725	1,5	115/230	Single	56	P30S54P150
	1725	1,5	230/460	Three	56	P30ST4P150
PLASTEC 35	850	2	230/460	Three	178	P35ST8P200
	1140	3	230/460	Three	135	P35ST6P300
	1725	7,5	230/460	Three	157	P35ST4P750
	1725	10	230/460	Three	157	P35ST4P1000
PLASTEC 50	1350	5,5	230/460	Three	415	P50ST6P550


Explosion Resistant series

	Motor RPMs	Motor Horse Power (HP)	Voltage (V)	Phase	Weight (lbs)	Part number
PLASTEC 15	1140	0,33	115/230	Single	53	P15XS6P033
	1725	0,33	115/230	Single	45	P15XS4P033
	1725	0,33	230/460	Three	39	P15XT4P033
	3450	0,5	115/230	Single	41	P15XS2P050
	3450	0,5	230/460	Three	33	P15XT2P050
PLASTEC 20	1140	0,33	115/230	Single	56	P20XS6P033
	1725	0,33	115/230	Single	48	P20XS4P033
	1725	0,33	230/460	Three	42	P20XT4P033
	3450	1	115/230	Single	43	P20XS2P100
	3450	1,5	115/230	Single	43	P20XS2P150
	3450	1	230/460	Three	63	P20XT2P100
	3450	1,5	230/460	Three	63	P20XT2P150
PLASTEC 25	1140	0,33	115/230	Single	59	P25XS6P033
	1725	0,5	115/230	Single	61	P25XS4P050
	1725	0,75	115/230	Single	61	P25XS4P075
	1725	0,5	230/460	Three	51	P25XT4P050
	1725	0,75	230/460	Three	51	P25XT4P075
	3450	3	230/460	Three	85	P25XT2P300
	3450	4	230/460	Three	85	P25XT2P400
PLASTEC 30	1140	0,75	115/230	Single	89	P30XS6P075
	1140	0,75	230/460	Three	84	P30XT6P075
	1725	1,5	115/230	Single	86	P30XS4P150
	1725	1,5	230/460	Three	80	P30XT4P150
	1725	1,5	230/460	Three	80	P30XT4P150
PLASTEC 35	1140	3	230/460	Three	214	P35XT6P300
	1725	7,5	230/460	Three	219	P35XT4P750
	1725	10	230/460	Three	219	P35XT4P1000

Exploded view

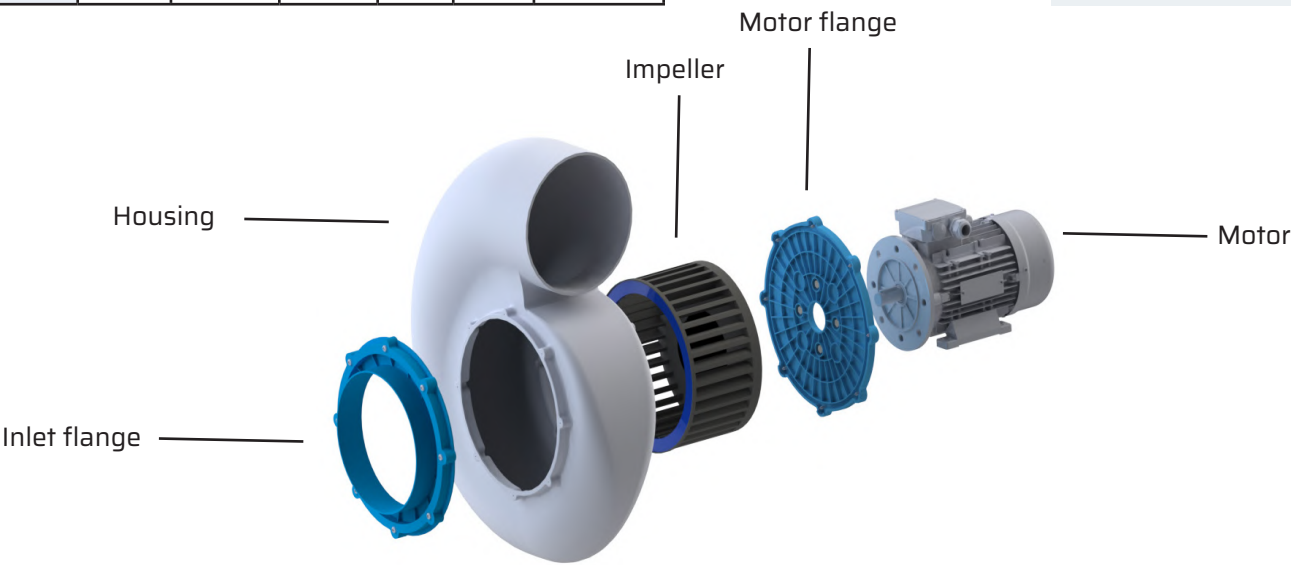


PLASTEC 20

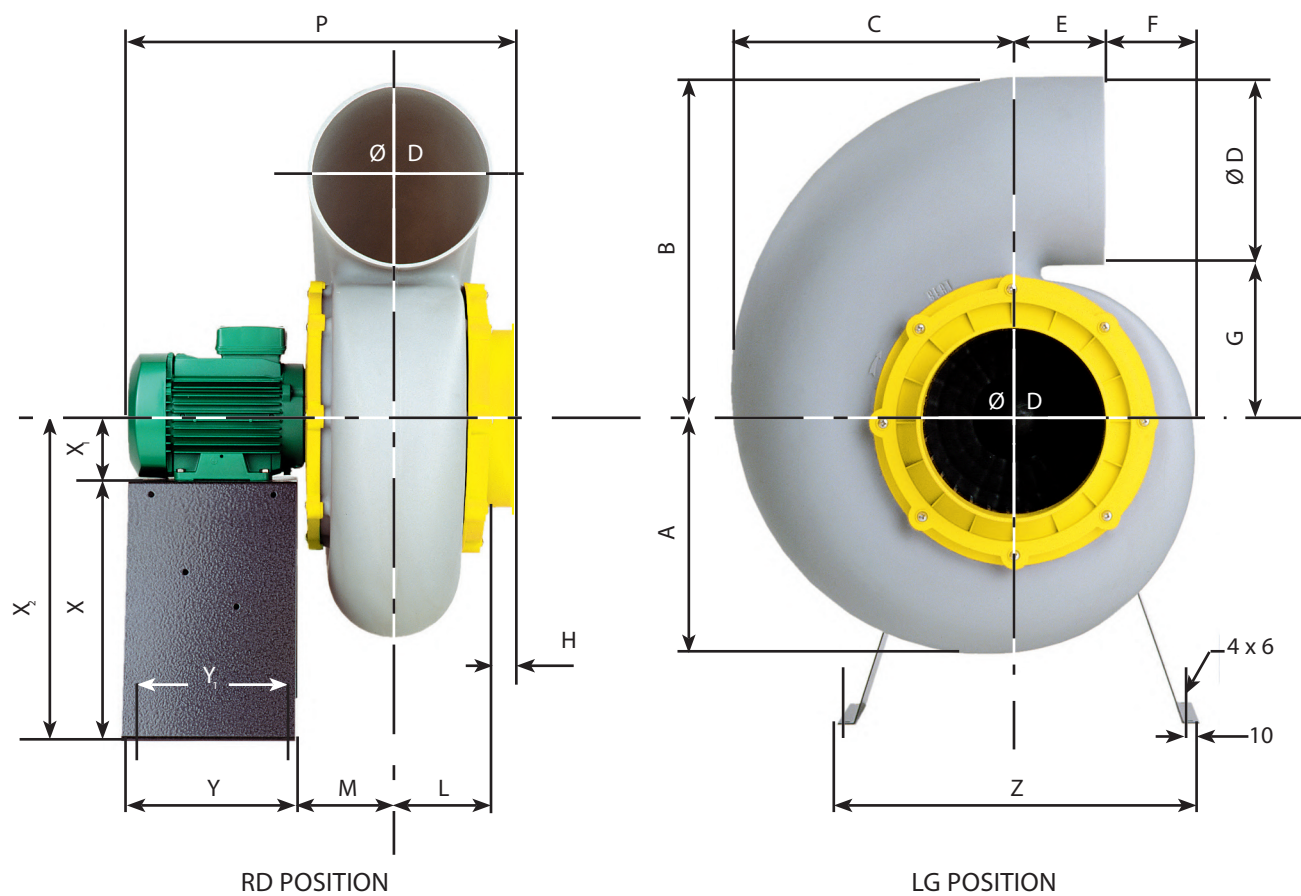

* Pictures and dimensions non-contractual

Dimensional data																
Metal stand is optional - Motor size may vary upon model																
A	B	C	Ø D	E	F	G	H	L	M	P	Y	Y ₁	Z	X	X ₁	X ₂
8.19	11.93	9.45	6.30	3.94	2.24	5.63	1.26	3.31	3.70	15.35	7.09	6.30	13.39	9.45	2.80	12.24

Discharge positions - View from inlet side							
CCW 360	CCW 45	CCW 90	CCW 135	CCW 180	CCW 225	CCW 270	CCW 315
CW 360	CW 45	CW 90	CW 135	CW 180	CW 225	CW 270	CW 315

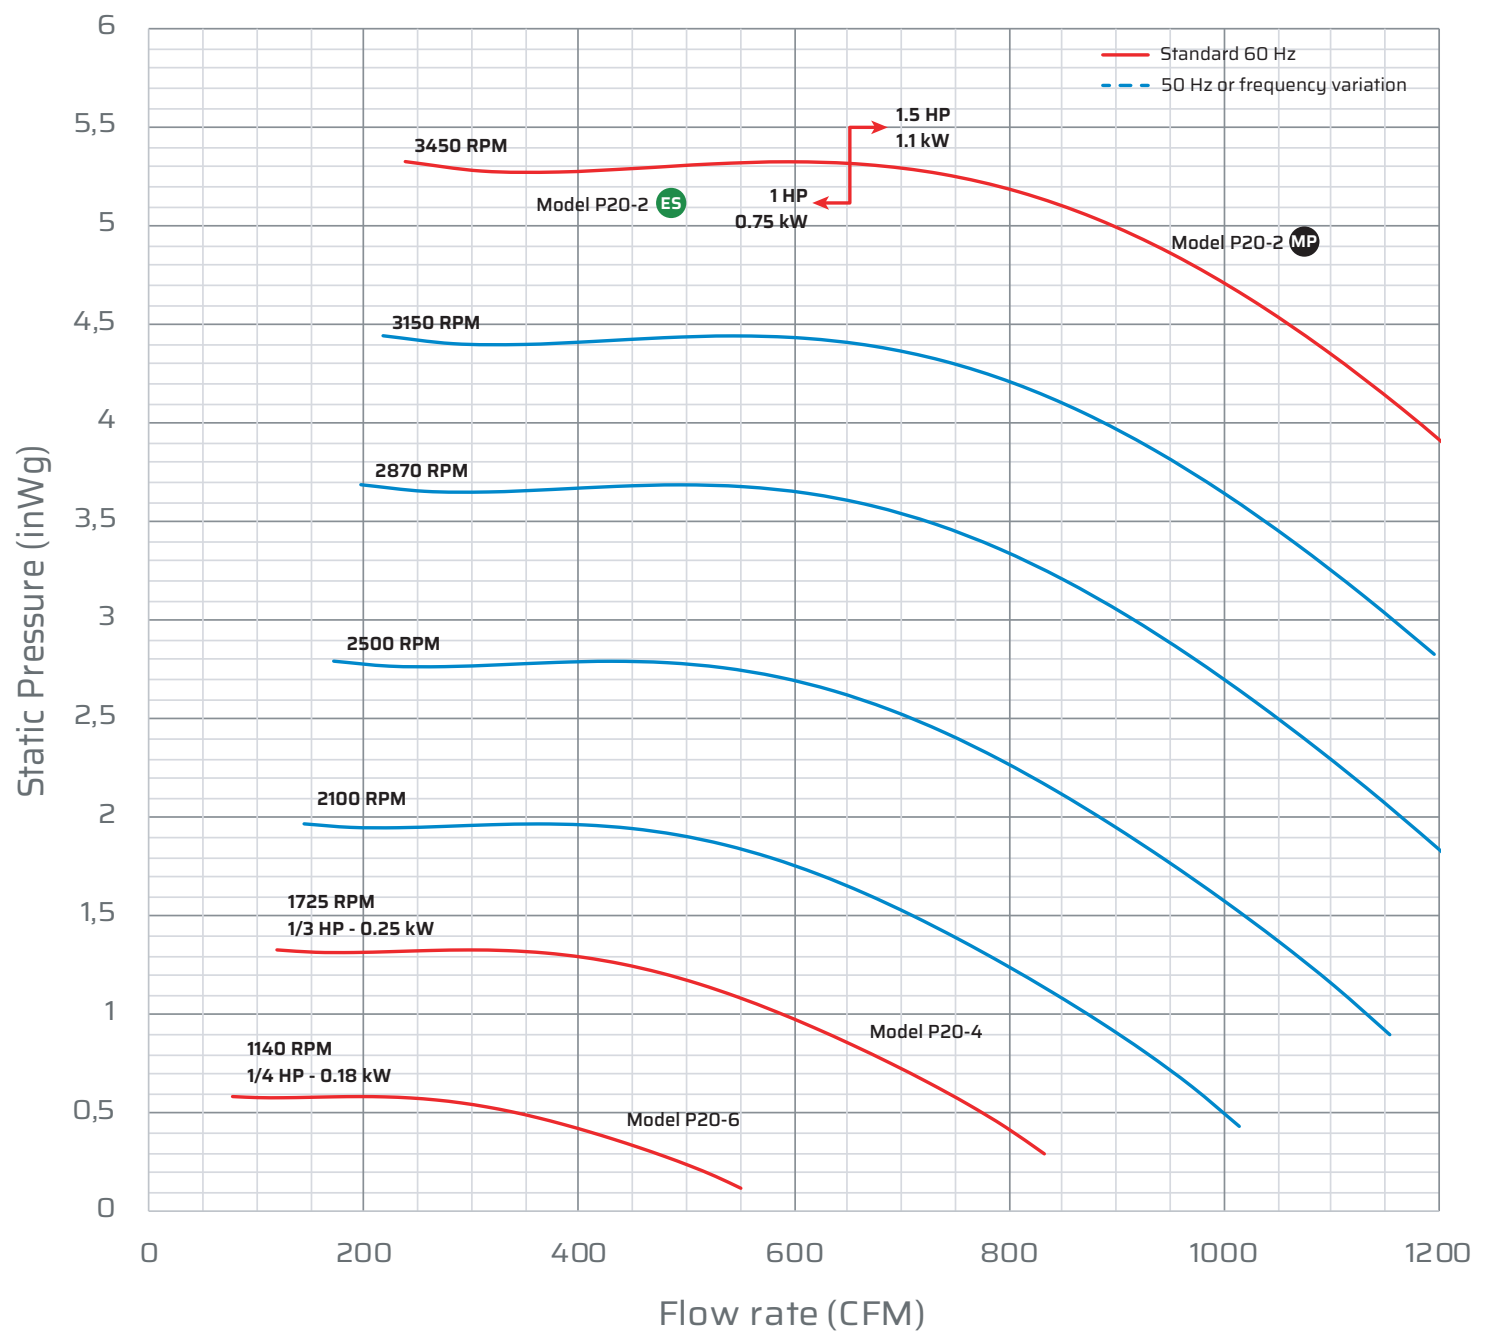


ES Energy saving model
MP Maximum power model

Inlet sound

	Q _v	SP	L _w A	L _p A *	Octave band (Hz)							
RPM	(CFM)	(inWg)	dB(A)	dB(A)	63	125	250	500	1000	2000	4000	8000
1725	531	1	80	59	97	79	84	77	70	59	56	50
3450	1060	4.2	95	74	112	95	99	92	85	74	71	65

* Acoustic pressure Lp at 10 feet - Outlet acoustic data available on request

PLASTEC 25

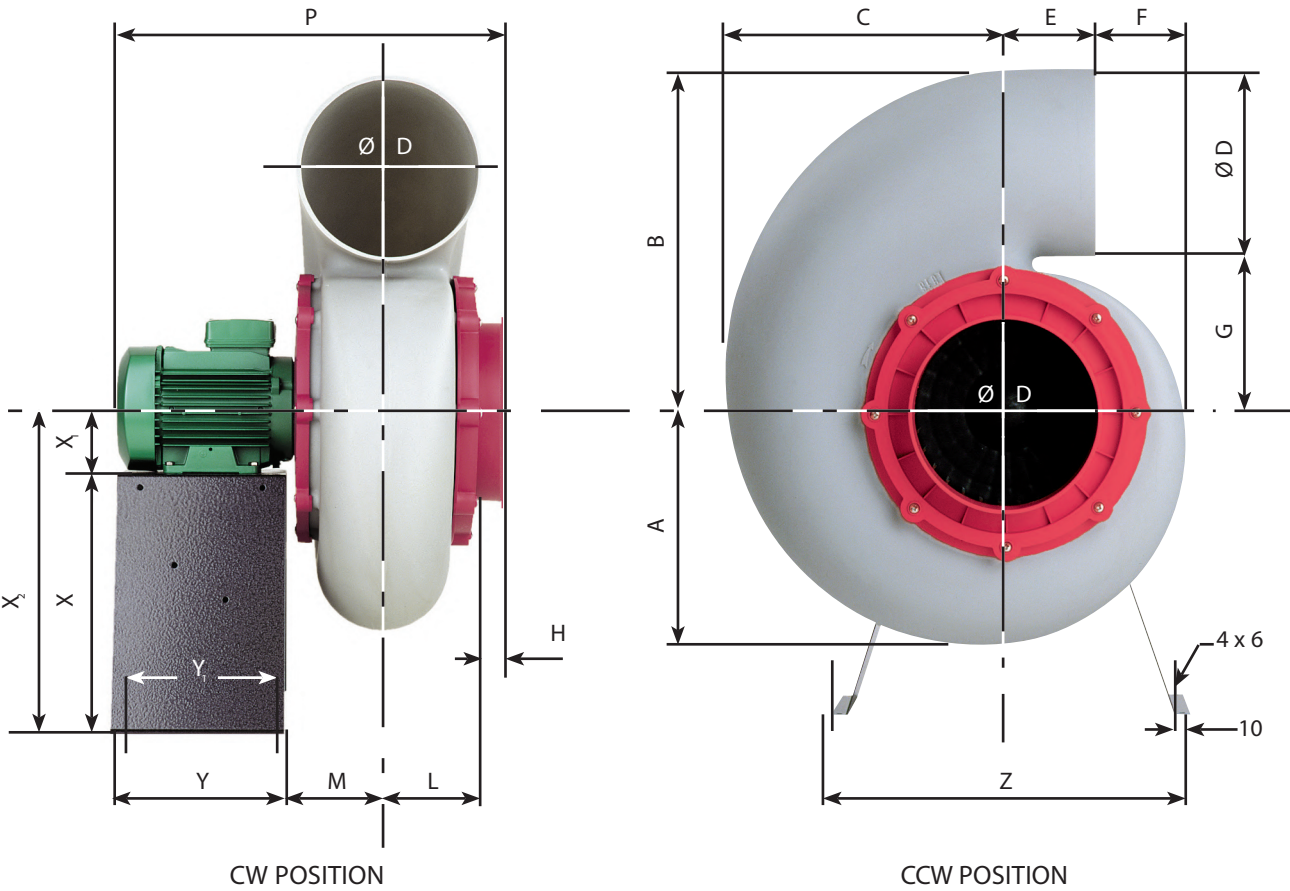

* Pictures and dimensions non-contractual

Dimensional data																
Metal stand is optional - Motor size may vary upon model																
A	B	C	Ø D	E	F	G	H	L	M	P	Y	Y ₁	Z	X	X ₁	X ₂
9.76	14.37	12.20	7.87	4.06	3.62	6.50	1.38	3.74	4.13	20.28	7.09	6.30	16.54	11.81	3.54	15.35

Discharge positions - View from inlet side							
							
CCW 360	CCW 45	CCW 90	CCW 135	CCW 180	CCW 225	CCW 270	CCW 315
							
CW 360	CW 45	CW 90	CW 135	CW 180	CW 225	CW 270	CW 315