




The air jacketed series of CO<sub>2</sub> Incubators offer dependable Infrared (IR) CO<sub>2</sub> Sensor control and are ideal for sensitive tissue and cell culture applications. They provide the benefits of contamination control and uncompromising temperature uniformity for even the most demanding incubations.

Precision is easily maintained with push-button calibration of both temperature and CO<sub>2</sub>, and audio/visual alarms that signal high/low temperature and CO<sub>2</sub> conditions. Modular controls and backup systems ensure confidence for incubating valuable samples, providing the dependable assurance you expect from a SHEL LAB incubator.

### Infrared (IR) CO<sub>2</sub> Sensors

For the fastest CO<sub>2</sub> recovery and most stable performance, this series features IR sensors.

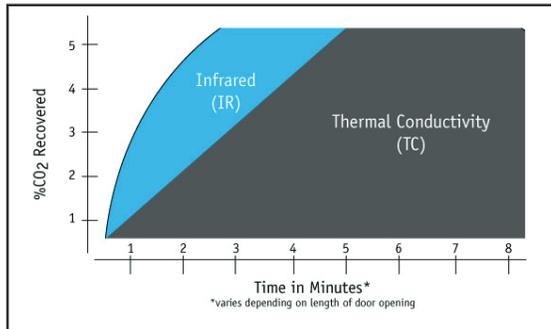

### Contamination Control



Extensive use of copper in the CO<sub>2</sub> sample port, heated CO<sub>2</sub> feed line, housing of the patented HEPA filtration system, and humidity pan with a copper SL decontamination token, adds reassurance that foreign microbes will not affect test results. Cleanup is a breeze with the all stainless steel chamber, and autoclavable door gasket. Optional copper shelves are available for even more contamination control.

### Patented Copper Coated HEPA Filter

A "Bacteriostatic" copper cage to trap particulate matter and reduce potential for chamber contamination. This filter removes 99.97% of all airborne microbes and isolated microbes 0.3 microns or larger.



unique design keeps shelf from tipping



copper shelving option



170 Shields Court Unit 2  
Markham, ON L3R 9T5  
TEL: (905) 475-5880 ext. 226  
FAX: (905) 475-1231

## Precise Temperature Control - Superior Uniformity

- Independent Over Temperature Thermostat
- Over Temperature & CO<sub>2</sub> Alarm
- Inner Glass Viewing Door
- Temperature Uniformity +/- 0.25°C at 37°C
- Temperature Range Ambient + 8°C to 60°C
- CO<sub>2</sub> Range 0 - 20%
- Infrared (IR) CO<sub>2</sub> Sensor Accuracy +/- 0.1%
- CO<sub>2</sub> Recovery Rate < 5 Minutes
- Relative Humidity Up to 95%
- Data Logging Capabilities

**5 Year Limited Warranty!**

We stand behind our product quality, ShellLab CO<sub>2</sub> Incubators come with the most extensive warranties in the industry.

- 5 years parts (labor included in the US)
- 7 years IR sensor



Copper Shelf Options	Part Number
Copper Shelf Kit (3 Shelves, 6 Sides)	9751206
Copper Shelf Sides	5820502
Copper Shelf	5820501

	Model Number		
	Air Jacket CO <sub>2</sub> Incubators	110-120V 220-230V	SC05A SC05A-2
	Details	Standard	Dual/Stacked Chambers
Exterior Dimensions (wxdxh)	Inches	27.3 x 28.0 x 37.8	27.3 x 28.0 x 75.6
	cm	69.3 x 71.2 x 95.9	69.3 x 71.2 x 191.8
Chamber Dimensions (wxdxh)	Inches	20.5 x 19.7 x 21.5	20.5 x 19.7 x 21.5 each
	cm	52.0 x 50.1 x 54.6	52.0 x 50.1 x 54.6 each
Incubator Chamber Capacity	cu ft	5	10 (5 each)
	L	142	284
Number of Shelves	Included	3	3 each

\* Specifications are based on nominal values at an ambient temperature of 25° C and a line voltage of 120V or 240V respectively. The temperature data is determined in accordance with DIN 12880. We reserve the right to alter technical specifications at any time. For a complete list of product specifications, call (800)322-4897 or visit the SHELL LAB website, www.shellab.com

0740542 4/14



170 Shields Court Unit 2  
 Markham, ON L3R 9T5  
 TEL: (905) 475-5880 ext. 226  
 FAX: (905) 475-1231

