

BIOVIEW

CAMERA & MONITOR




IDEAL FOR A WIDE VARIETY OF APPLICATIONS:

- Research, Teaching, & Demonstration
- Pathology, Cytology, Oncology, Hematology, Semen Evaluation
- Dental Applications
- Industrial & Manufacturing

Labequip

170 Shields Court Unit 2
Markham, ON L3R 9T5
TEL: (905) 475-5880 ext. 226
FAX: (905) 475-1231

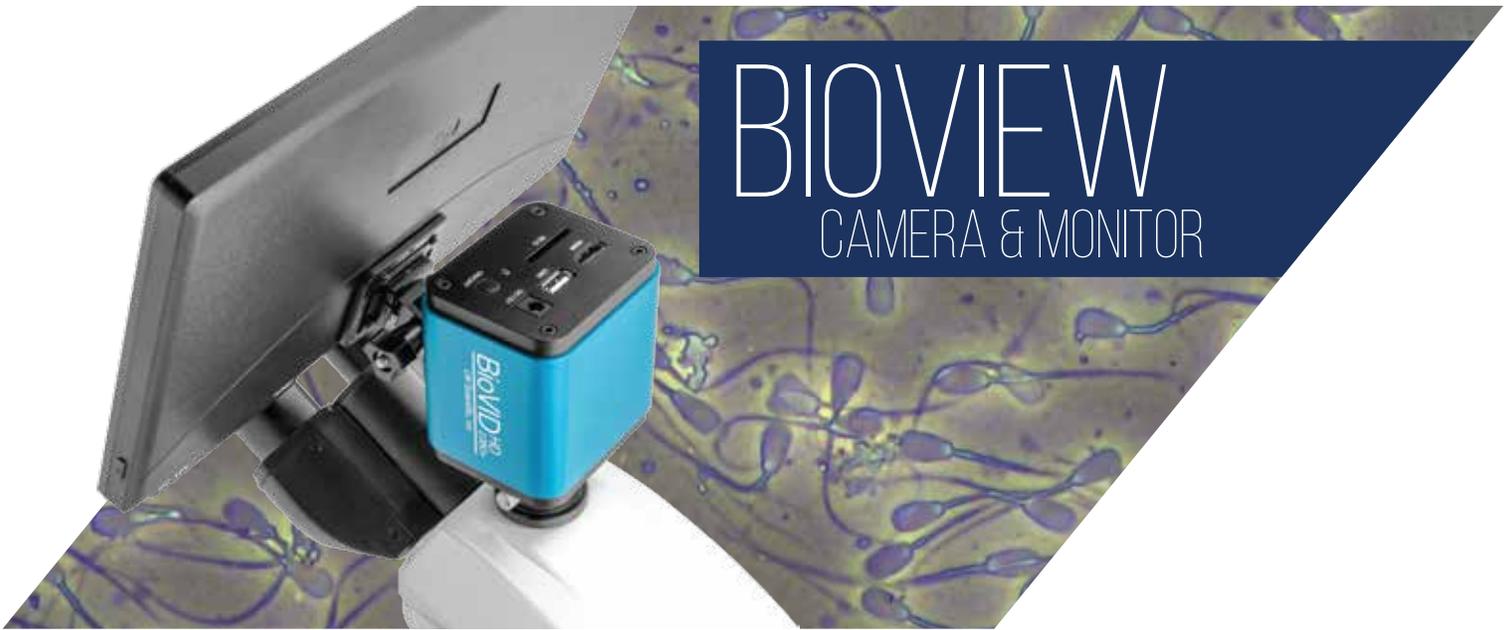

BIOVIEW

CAMERA & MONITOR

The **BioVIEW** microscope camera and monitor is the essential tool for live presentations and client education. The premium **BioVID HD 1080+** camera paired with the 1080p 11.6" HD Monitor provides a bright and beautiful image. Simply mount the camera onto any trinocular C-mount for amazing resolution and fast-action video (60fps). Using the included mouse and SD card, click to save and view images and videos...even view side-by-side comparisons. Additionally, use the included USB cable and advanced imaging software to save and edit images and videos onto your computer. The **BioVID HD 1080+** camera has 1920x1080 resolution, increased sensitivity, low-noise, and great color rendition, creating stunning, high-resolution imaging on the attached 1080p HD monitor...or on any large HDTV or projector. The extra large pixel size on the Sony IMX236(C) CMOS chip ensures crisp images in bright field (even at high magnifications) while providing the sensitivity needed to view and capture precise images in low-light applications, such as dark field, phase contrast, and epi-fluorescence. Whether in a large lecture hall, a classroom, the laboratory, or the clinic, the **BioVID HD 1080+** will ensure clients and students see microscope images clearly.

Choose from **HDMI** and/or **USB** outputs or save images and videos to the included **SD card**.



170 Shields Court Unit 2
Markham, ON L3R 9T5
TEL: (905) 475-5880 ext. 226
FAX: (905) 475-1231

When using HDMI output only, an ONSCREEN camera control panel and tool bar allow you to access the following features with a few clicks of the included USB mouse:

- Color adjustment, exposure, white balance
- Sharpness and denoising
- Zoom and freeze, Mirror and comparison
- “Side-by-Side” viewing

For USB output, advanced image software allows these features:

- 2D measurement
- HDR (High Dynamic Range) for more accurate representations of color and light
- Image stitching
- EDF (Extended Depth of Focus)
- Image segmentation and count, image stacking
- Color composite
- Sharpness and denoising

SIMULTANEOUS HDMI AND USB OUTPUT FEATURE ALLOWS YOU TO PROJECT LARGE IMAGES/VIDEOS ONTO ANY MONITOR WHILE HAVING THE OPTION TO MANIPULATE, SAVE, AND EMAIL THE SAME IMAGES FROM YOUR COMPUTER.



Model Number: BVC-I080-CMT3

Description: BioVID HD1080+ Camera ONLY



Model Number: BVC-I080-TVK3

Description: BioVIEW HD1080+ Camera and Monitor



Model Number: INS-T4BV-INS3

Description: Innovation Trinocular Microscope with BioVIEW Camera and Monitor

Labequip

170 Shields Court Unit 2
Markham, ON L3R 9T5
TEL: (905) 475-5880 ext. 226
FAX: (905) 475-1231

BIOVIEW MONITOR SPECIFICATIONS

Features:

- Panasonic super TFT LCD display
- True 1080p resolution
- 16.7 million colors
- High contrast ratio up to 1,000:1
- LED backlight with 50000 hours lifetime
- 11.6-inch active view area
- IPS full wide-angle viewing

Operating Environment:

Operating Temp:	-15° to 55° C
Humidity:	10-90%
Synchronization Range:	30-80 KHz horizontal 55-75 Hz vertical
Power Supply:	AC 110v-220v auto-switching input DC 12v /1a output
Power Consumption:	Max 12w

Performance:

Input:	HDMI
Resolution:	1920 x 1080
Display Type:	16:9 ratio, 11.6 inch, Active matrix super TFT LCD
Contrast Ratio:	1,000:1
Colors:	16.7 million
View Angle:	IPS full view
Display Area:	258mm W x 145mm H
Pixel Pitch:	0.134mm W x 0.134mm H
Brightness:	350 CD/sq.m
Back Light:	5,000 hours
Dimensions:	281mm L x 179mm H x 15.6mm D
Weight:	400g

BIOVID HD 1080+ CAMERA SPECIFICATIONS

Resolution:	1920x1080
Image Sensor:	1 / 2.8" (5.5x3.4mm) Sony IMX236(C) CMOS color
Pixel size:	2.8um x 2.8um
Auto-Exposure:	0.1ms-999ms
Power:	cUL / CE approved power adapter AC Input: 100-240Vac 50/60Hz, 0.31A (Auto-switching power adapter) DC Output: 12V, 1.0 amp

Operating Condition:

Temperature:	-10°C ~ 50°C (14°F to 122°F)
Humidity:	30-80%RH

Connections & Controls:

USB Port:	USB computer cable or USB mouse
HDMI Port:	HDMI cable to TV
DC 12v Jack:	12v DC power in
SD Slot:	For included SD card
ON/OFF:	Power button
LED Light:	Red=off, Blue=on

Requirements:

Operating System:	Microsoft Windows XP, Vista, 7, 8, 10 (32 & 64 bit), Mac OSX, Linux
CPU:	Intel Core2 2.5 or higher
Memory:	> 4GB
USB 2.0 High-speed port	

Video Output:

HDMI:	User interface: USB mouse (included) Image/Video Capture: SD card Video: 60 frames per second @ 1920x1080 (HDMI) On screen-camera control panel and tool bar
USB:	Includes software for capturing, rotating, measuring, etc. Image/video capture into PC Image capture into Mac Video: 30 frames per second @ 1920x1080 (USB) White balance and standard color controls

Weight and Dimensions:

Height:	3.6" (92mm)
Length:	2.8" (70mm)
Width:	3.1" (78mm)
Weight:	1.03lbs. (0.47kg)



170 Shields Court Unit 2
Markham, ON L3R 9T5
TEL: (905) 475-5880 ext. 226
FAX: (905) 475-1231