

ANALYTICAL BALANCES AS 3Y



release date 28-04-2017



Balances AS 3Y series are laboratory weighing instruments featuring 5,7" LCD colour touch panel which provides new possibilities of balance operation and presenting measurement results. Personalization of balance settings is carried out in extended user profiles. AS 3Y series comes standard with system of automatic adjustment using an internal mass standard. Level control is based on LevelSENSING system, RADWAG patented solution, which uses a system of an electronic level. New function of AS 3Y series is online monitoring of ambient conditions through built-in sensors or an external ambient conditions module THB 3 series. AS 3Y series comes standard with esthetic weighing chamber protected by an anti-draft shield. Design of the weighing chamber enables easy disassembling of its glass parts, for keeping clean sterile. Interactive formulation mode in the AS 3Y series is a reliable tool for creating various mixtures with application of databases. Differential weighing mode aids mass control of the same sample subjected to differed processes over time. Extended databases enable storing all carried out measurements, with option of printing and exporting them. Standard and user defined printouts allow for maintaining documentation complying with GLP/GMP requirements practically in any application. AS 3Y series features an independent mass control mode carried out with application of an automatic feeder PA-02/H.

-  Parts counting
-  Dosing
-  Checkweighing
-  Formulation
-  Percent deviations
-  Statistics
-  Animal weighing
-  Differential weighing
-  Pipettes calibration
-  Statistical Quality Control
-  Autotest (GLP, Filter)
-  Density determination
-  Air buoyancy compensation
-  GLP procedures
-  Infrared sensors
-  Ambient conditions monitoring
-  Newton unit measurement
-  Replaceable units
-  Mass control
-  Mass for titrator


✓ Removable glass parts: side, top and back!



Additionally option: AS xx.3Y.B

NOVELTY: 3Y series balances are equipped with **802.11b/g/n WiFi** communication interface operating with frequency range 2.4÷ 2.472 GHz (1÷13 channels). Communication is established likewise as for any other interfaces, e.g.: RS 232, Ethernet.

Dimensions:

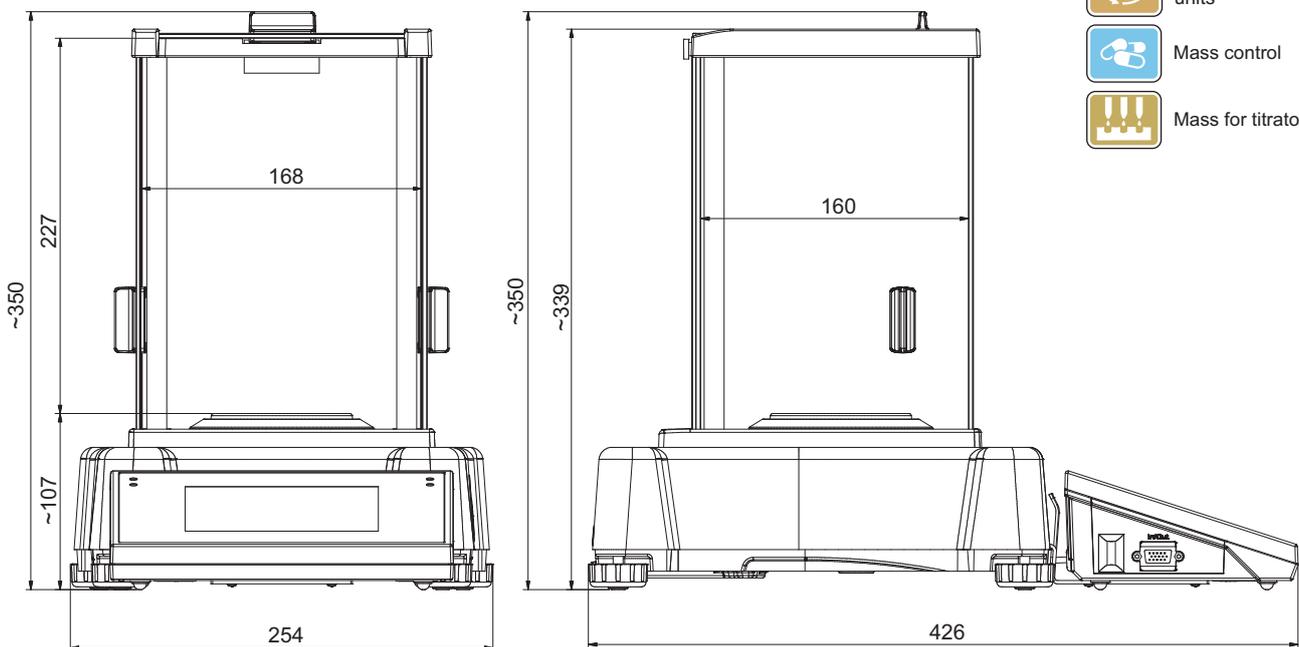

Technical specification:

	AS 220.3Y	AS 310.3Y	AS 510.3Y
Verification	YES	YES	NO
Max capacity	220 g	310 g	510 g
Minimal load	10 mg	10 mg	10 mg
Readability	0,1 mg	0,1 mg	0,1 mg
Tare range	-220 g	-310 g	-510 g
Working temperature *		+10° ÷ +40°C	
Relative air humidity ***		40% ÷ 80%	
Repeatability **	0,1 mg (Rt ≤ 220g)	0,1 mg (Rt ≤ 220g) 0,2 mg (220g < Rt ≤ 310g)	0,1 mg (Rt ≤ 220g) 0,2 mg (220g < Rt ≤ 310g) 0,3 mg (310g < Rt ≤ 510g)
Linearity	± 0,2 mg	± 0,3 mg	± 0,4 mg
Stabilization time	3,5 s	3,5 s	3,5 s
Sensitivity drift		1 ppm/°C in temperature +15° ÷ +35°C	
Minimum weight (USP)		200 mg	
Minimum weight (U = 1%, k = 2)		20 mg	
Interface	2×USB, 2×RS 232, 1×Ethernet, Wireless Connection, 4 Inputs / 4 Outputs (digital)		
Power supply		13,5 ÷ 16 V DC / 2,1 A	
Adjustment / Calibration		internal (automatic)	
Pan size	Ø 100 mm	Ø 100 mm	Ø 100 mm
Display		5,7" touch panel	
Packaging size		600×400×540 mm	
Net weight/Gross weight		6,2 kg / 11 kg	

* The balance maintains its parameters in accordance with type approval in temperature 18°C ÷ 30°C

** Repeatability is expressed as a standard deviation from 10 weighing cycles (mass of 60g for balances with d=0,01mg and 220g for balances with d=0,1mg)

*** Non-condensing conditions

Additional equipment:

Antivibration table for laboratory balances	Additional LCD display "WD-5"
Professional weighing table	Density determination kit
Dot matrix Epson printer	PC USB keyboard
Label printer Citizen	Automatic feeder PA-02/H
HOLDERS for glass vessels	Power adapter with battery and charger ZR-02
Tare and "Print" foot button	Rack for under hook weighing
R-LAB computer software	Standard mass
Antistatic ionizer DJ-02	Antistatic cable PA 1
THB ambient conditions module	Bar code scanner
	Cable RS 232 (scale, Epson , Citizen printer) "P0151"