



Sterilization & Life Science Solutions

T-Lab Eco



The Economic Laboratory Autoclave From The World's Premium Manufacturer

Vertical Autoclave







Minimal Laboratory Resource Consumption



T-Lab Eco was developed especially for educational institutions and research facilities. Designed with simplicity and economy in mind.

This vertical floor-standing autoclave covers the fundamental needs for general lab sterilization with the aim of increasing the **productivity** of your laboratory.

Offering high capacity, together with the **optimization** of resources such as water, power and operating time .

An affordable and reliable solution you can count on for managing your laboratory **workload.**

Sterilization Application

Intended for the sterilization of a wide range of liquids and solids such as glassware, metal utensils and other laboratory items.

This reliable workhorse is ideal for the general laboratory in need of easy operation, safety and cycle features for day-to-day needs.



Making Your Process Easier, Accurate and Affordable

Intuitive, user friendly technology, including color touchscreen and multiple programs for sterilization.

Advantages Include:



Reliable Performance

This basic product will do what you need and expect

- Solid and glassware loads
- Liquid loads
- Efficient sterilization time including cooling
- Two PT100 load sensors as standard



Affordable 🍣

Less is More

Built to last without paying for the features and parts you do not need

Greater Value at Lower Cost

Less water wasted, less electricity consumed, less time spent on maintenance and repair.



Safety

Meets U.S. Regulations

ASME standards



Plug & Play

This autoclave's plug and play mode does not require dedicated installation connections, simply a power source

- Multicolor user-friendly touch screen
- Connectivity to local area network through ethernet port. *Report generating R.PC.R software is accessible through local network computer.
- Stores the last 999 cycles in built-in memory
- Portable comes standard with lockable wheels



🄆 Versatile

Adaptable for All Your Basic Needs


- Sterilizes liquids, solids, sealed and unsealed bottles
- Performance and quality within a small space
- Cylindrical autoclaves easier to operate, less expensive to maintain, and more reliable over a longer working life

EQUIPPED WITH UNPARALLELED FEATURES, UNIQUE TO T-LAB ECO

- Two PT100 sensors
- Built-in cooling fan
- High-resolution touchscreen
- Built-in memory: 999 cycles





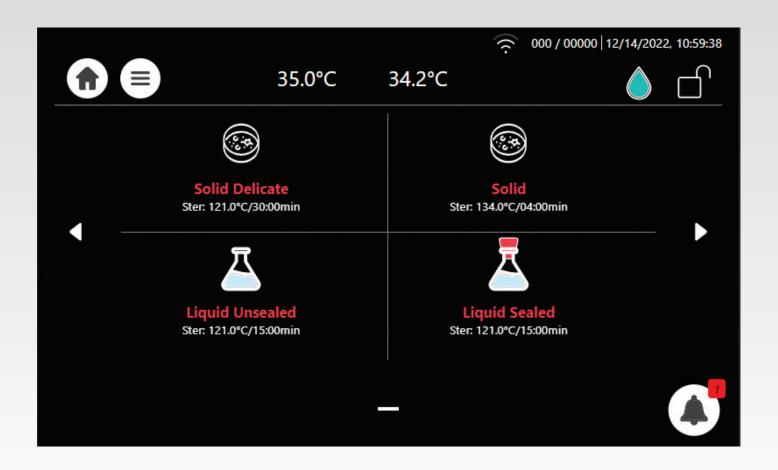

STERILIZATION PROGRAM

| Cycle icon | Cycle name | Temperature | Sterilization time (minutes) V60 | Sterilization time (minutes) V85 | Load Type |
|------------|-----------------|-------------|-------------------------------------|-------------------------------------|--------------------------|
| | Liquid Sealed | 121°C | 15 | 15 | Container with Liquid |
| | Liquid Unsealed | 121°C | 15 | 15 | Container with Liquid |
| | Solid 134 | 134°C | 4 | 4 | Solid Load |
| | Solid 121 | 121°C | 30 | 30 | Solid Load |

LOADING CAPACITIES



| ERLENMEYER FLASKS Size | V60 Total Units : #Unit × #Basket | 100 10101 0111101 | BOTTLES / Schott Duran Size | V60 Total Units : #Unit × #Basket | |
|----------------------------------|--------------------------------------|-------------------|----------------------------------|--------------------------------------|--------|
| 250 ml Ø 85 ×143 mm | 13 × 2 | 13 × 2 | 250 ml Ø 70 ×143 mm | 19 × 2 | 19 × 2 |
| 500 ml Ø 105 × 183 mm | 8 × 2 | 8 × 2 | 500 ml Ø 86 × 182 mm | 12 × 2 | 12 × 2 |
| 1000 ml Ø 131 × 230 mm | 5 × 2 | 5 × 2 | 1000 ml Ø 101 × 230 mm | 8 × 2 | 8×2 |
| 2000 ml Ø 166 × 280 mm | 3 × 1 | 3 × 1 | 2000 ml Ø 136 × 260 mm | 4 × 1 | 4 × 1 |

^{*} Loading capacities in this table are for guidance purposes only.

^{*} Total units per basket have been calculated using International Standard Erlenmeyer Flasks and Schott Duran.





| Baskets dimensions | | | | |
|-----------------------|---------------|---------------|--|--|
| Specifications | V60 | V85 | | |
| Basket Ø × H (inches) | 14.2" x 7.4" | 14.2" x 11" | | |
| Pail Ø × H (inches) | 13.7" x 12.6" | 13.7" x 17.7" | | |
| Tray Ø × H (inches) | 13.6" x 1.6" | 13.6" x 1.6" | | |

Optional Thermal Printer

T-LAB Printer – Desktop Direct Thermal Bar Code Printer



| Technical Features | |
|-----------------------------------|--|
| Resolution | 8 dots/mm (203 DPI) |
| Overall Dimensions W × H × D (mm) | 4.29" × 6.73" × 8.23" |
| Weight | 2.65 lbs. (1.2 kg) |
| Label roll capacity | 5 Inches (127 mm) OD |
| Memory | 4 MB Flash memory 8 MB SDRAM microSD card for flash memory expansion, up to 4 GB |
| Interface | RS-232 USB 2.0 Bluetooth (user option) |
| Accessories | Windows labelling software CD disk External universal switching power supply |

TECHNICAL SPECIFICATIONS

| Specifications | V60 | V85 |
|---|--|--|
| Chamber Volume (Litres) | 60 | 85 |
| Weight (lbs.) | 244.7 lbs. | 264.5 lbs. |
| Chamber Dimensions $\emptyset \times D$ (inches) | 15.4"x19.9" | 15.4"x27.6" |
| External Dimensions W×H×D (inches) | 25.4"x38.8"x31.9" | 25.4"x38.8"x31.9" |
| Shipping Dimensions W×H×D (inches) | 32.3"x49.3"x35.5" | 32.3"x49.3"x35.5" |
| Ratings | Voltage: 220-240 VAC Single Phase Power: 3000 W Amperage: 13.1 A | Voltage: 220-240 VAC Single Phase Power: 5400 W Amperage: 22.3 A |
| Wastewater tank | 3 Litres | 3 Litres |
| Cooling water tank | 6 Litres | 6 Litres |
| Maximum Allowable Working Pressure | 40.6 psi | 40.6 psi |







Your lab infection control success is backed with 95 years of global leadership experience

A leader in infection prevention

since 1925 Products distributed to clinics, hospitals, and research institutions in more than

countries

International Sales and Marketing

E-mail: info@tuttnauer.com www.tuttnauer.com

Tuttnauer Europe B.V.

Hoeksteen 11, 4815 PR PO Box 7191, 4800 GD Breda The Netherlands Tel: +31 765 423 510

Fax: +31 765 423 540 E-mail: info@tuttnauer.nl

Tuttnauer USA Co.

25 Power Drive, Hauppauge, NY 11788 Tel: +800 624 5836, +631 737 4850 Fax: +631 737 0720

E-mail: info@tuttnauerUSA.com www.tuttnauer.com/us

Distributed by:













